

CABLES FOR OUTDOOR INSTALLATIONS

F/UTP Category 5e

APPLICATION



PBX, V.11, X.21, ISDN, Ethernet (10Base-T), ATM-25/52/155 Mbit/s, 100VG-AnyLAN, Fast Ethernet (100BASE-TX), Token Ring 16/100 Mbit/s, Gigabit Ethernet (1000BASE-T), Firewire 100 Mbit/s

COMPLIANCE WITH THE REQUIREMENTS

ISO/IEC 11801:2002
EN 50173-1:2002
ANSI/TIA/EIA-568-B.2-2001
IEC 61156-5:2002
TU U 31.3-05758730-020-2002

DESIGN

- 1) Conductor: soft copper wire
Diameter: 0.51 mm (24 AWG)
- 2) Insulation: polyethylene
Conductor diameter: 1.07 mm
Pair: two conductors twisted together
Colour identification of pairs:
pair 1: white-blue / blue
pair 2: white-orange / orange
pair 3: white-green / green
pair 4: white-brown / brown
Core: 4 pairs twisted together with a string
- 3) Pair shield: aluminum polymer foil (metal inside).
Copper tinned contact wire \varnothing 0.4 mm is applied longitudinally under the shield.
- 4) Sheath: UV-stabilized polyethylene
Sheath colour: black
Maximum cable diameter: 7.6 mm

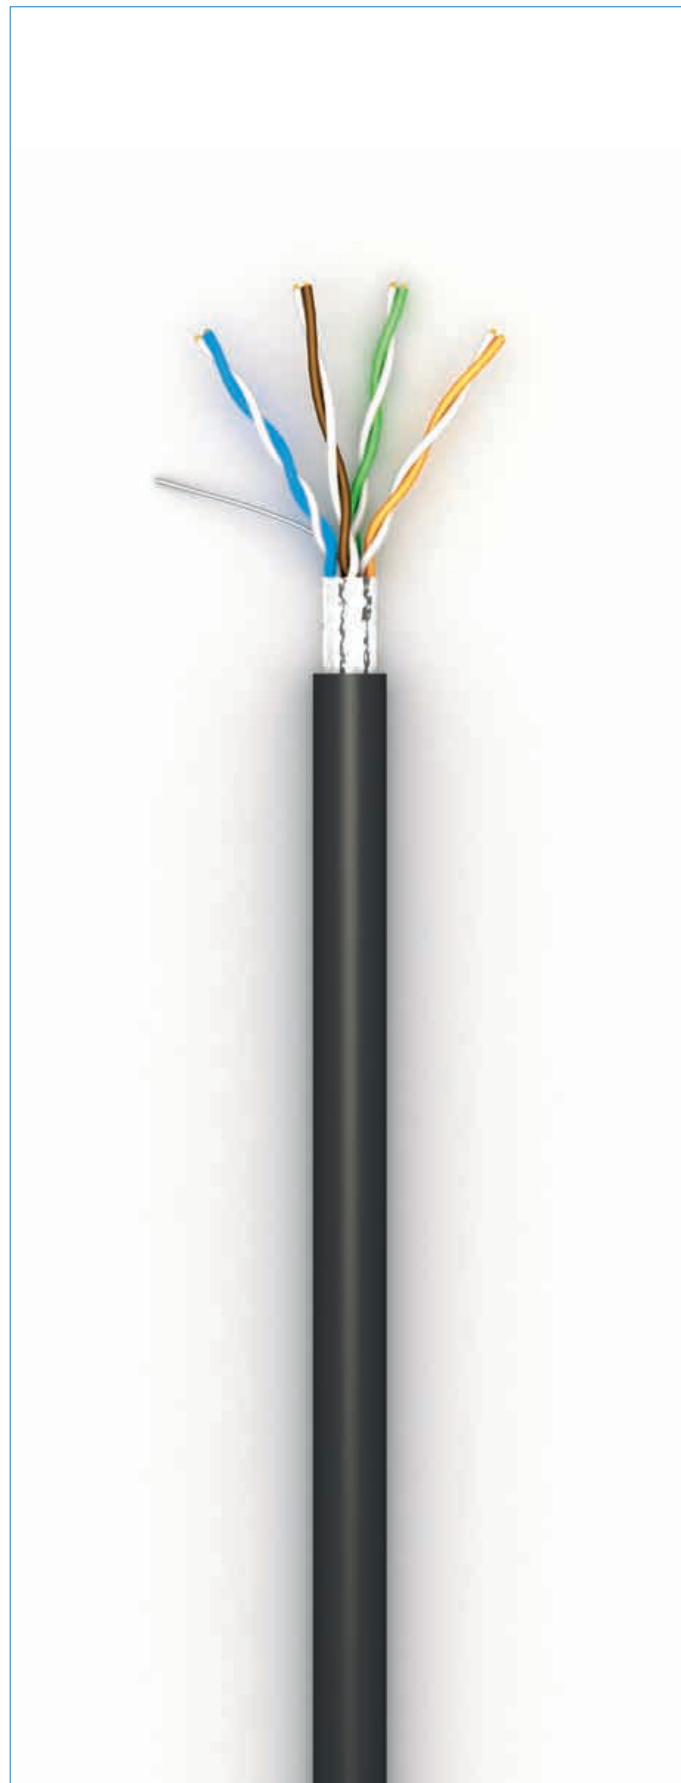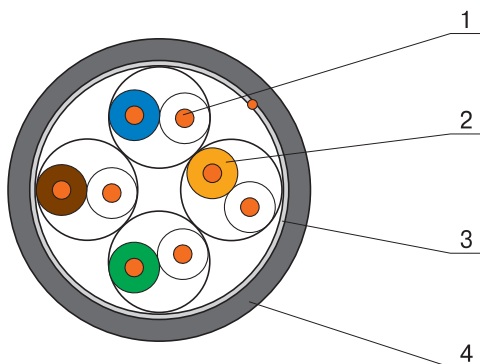

CABLES FOR OUTDOOR INSTALLATION

F/UTP Category 5e

INSTALLATION AND OPERATION CONDITIONS

For outdoor installation in cable ducts, collectors, shafts and along building walls. Operation in conditions of heightened electromagnetic impacts on frequencies up to 100 MHz.

ELECTRICAL CHARACTERISTICS AT 20 °C

Direct current resistance	≤ 96 Ohm/km
Insulation resistance	≥ 5 GOhm/km
Capacitance	≤ 56 pF/m
Signal propagation velocity	≥ 0.68 s
Propagation delay	≤ 534+36/√f ns/100 m
Delay shift on 100 MHz	≤ 45 ns/100 m
Characteristic impedance in the frequency range of 1 to 100 MHz	100±10 Ohm
Screening attenuation in the frequency range of 30-100 MHz	≤ 40 dB
Test voltage between cores, cores and shield (DC, 2 s)	2.5 kV
Working voltage (DC)	72 V

MECHANICAL CHARACTERISTICS

Temperature range:	
During installation	-15 °C ... +60 °C
After installation	-50 °C ... +60 °C
Bending radius:	
During installation	≥ 10 cable diameters
After installation	≥ 4 cable diameters
Tensile stress	85 N

MARKING

OK-net <year of production> FTP outdoor CAT.5e 100 MHz
4Pr AWG24 NVP 68% ISO/IEC 11801 100 OHM K-29
<metric mark>

SIGNAL TRANSMISSION PERFORMANCE AT 20 °C

Frequency (MHz)	Attenuation (dB/100 m)		NEXT (dB)		PS-NEXT (dB)		EL-FEXT (dB)		PS-ELFEXT (dB/100 m)		RL (dB)	
	max.*	nom.	min.*	nom.	min.*	nom.	min.*	nom.	min.*	nom.	min.*	nom.
1**	2,1	1,9	65,3	78,0	62,3	75,0	64,0	70,0	61,0	67,0	20,0	25,00
4	4,1	3,8	56,3	76,0	53,3	73,0	52,0	58,0	49,0	55,0	23,0	30,00
10	6,5	6,0	50,3	74,0	47,3	71,0	44,0	52,0	41,0	49,0	25,0	37,00
16	8,3	7,7	47,2	70,0	44,2	67,0	39,9	48,0	36,9	45,0	25,0	34,00
20	9,3	8,6	45,8	69,0	42,8	66,0	38,0	46,0	35,0	43,0	25,0	34,00
31,25	11,7	10,9	42,9	63,0	39,9	60,0	34,1	40,0	31,1	37,0	23,6	33,00
62,50	17,0	15,8	38,4	60,0	35,4	57,0	28,1	36,0	25,1	33,0	21,5	28,00
100	22,0	20,5	35,3	58,0	32,3	55,0	24,0	32,0	21,0	29,0	20,1	24,00

*IEC 61156-5:2002

**Values lower than 4 MHz are given for information only

ORDER INFORMATION

Code	Cable type	Sheath	Packing	Weight, kg/km
49330	КППЭ-ВП (100) 4x2x0,51 (FTP cat.5e)	PE	Box 305 m	46.0